



Roller Spindle Fitting Instructions For Garador

1. Care must be taken to ensure the cable is removed from the spindle before attempting to disconnect the link arm bracket
2. Pull the cable across the door in the direction of the arrow, shown below. Ensure that the cable is snugly bedded in the grooves of both pulley wheels. Pull the cable until the retaining bracket at the end of the spring is engaged in its socket (it is recommended that a piece of cloth is used between the cable and hand). Some assistance may be required using the free hand to engage

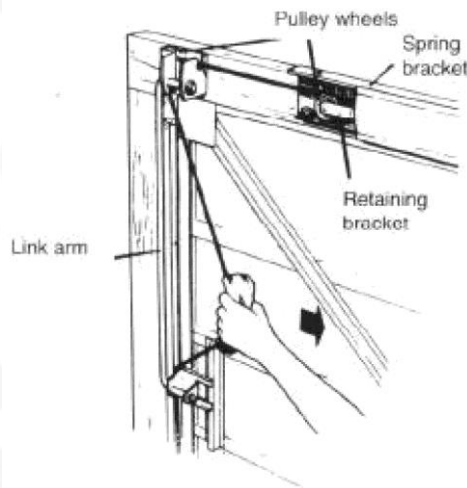

3. Loosen the side track to enable spindle to be removed. Re-position after fitting new part



4. Attach eye at the end of the cable to hook on the roller spindle
5. Take up the slack wire by pulling the cable across the door in the direction of the arrow. Ensure that the cable is snugly bedded in the grooves of both pulley wheels. Pull the cable until the retaining bracket at the end of the spring is released from its socket (it is recommended that a piece of cloth is used between the cable and hand). Some assistance may be required using the free hand to the retaining bracket in its socket. Lightly pull the retaining bracket clear of its socket should it not completely release

SAFETY NOTE

Safety glasses and gloves should be worn at all times. If in doubt, this work should be carried out by an experienced installer. You may require assistance.

Warning: it is important the instructions are followed correctly as damage to cable or loss of pre-tension may occur.

All work is undertaken at your own risk.

SKU: GAS4060